


Product & Installation Details

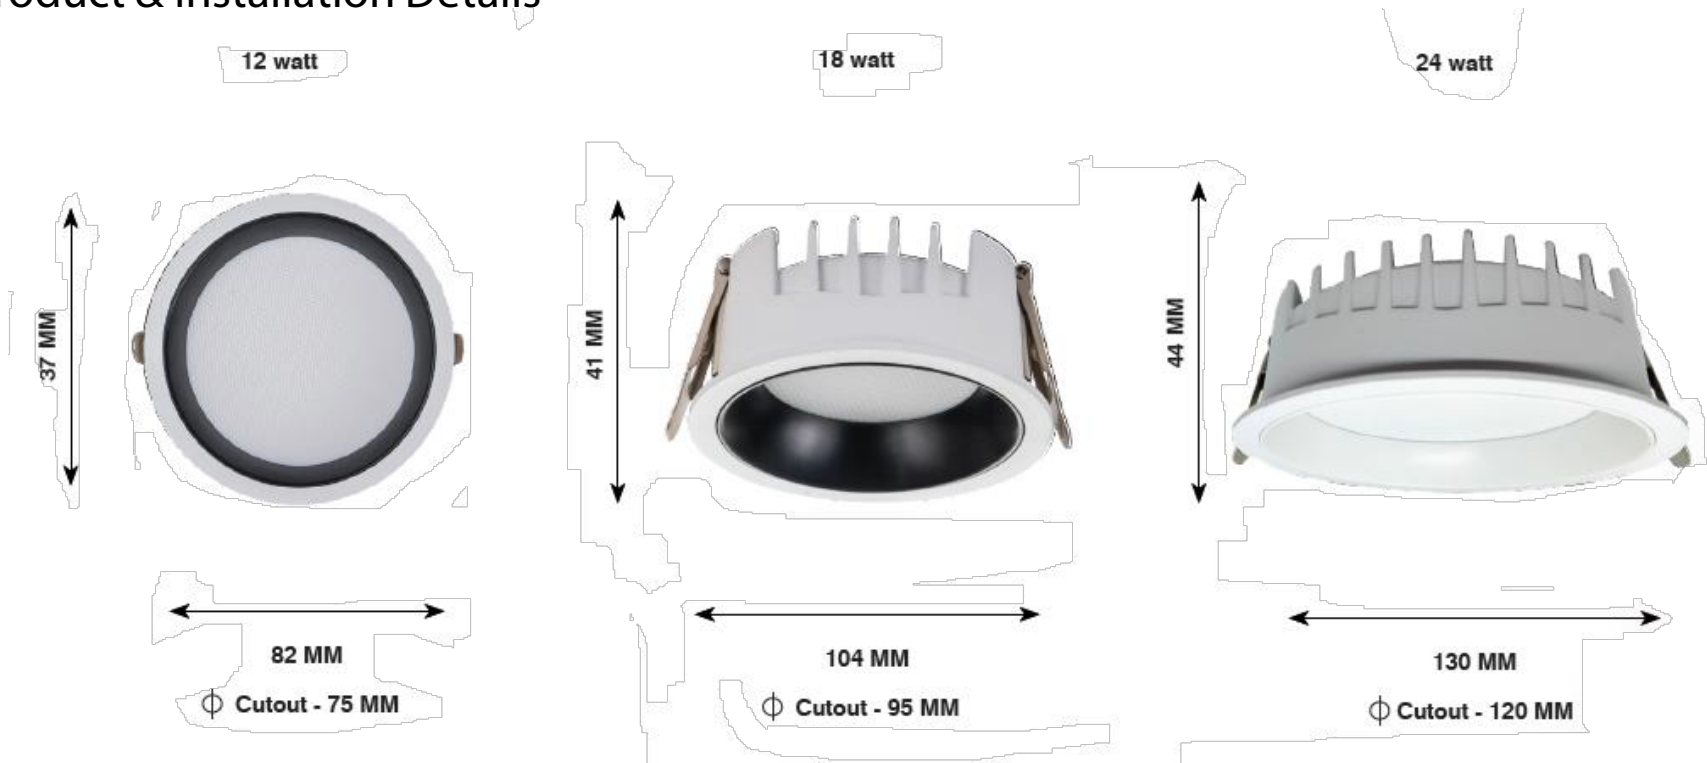

General Specifications

|                                  |                                             |                                          |                                             |
|----------------------------------|---------------------------------------------|------------------------------------------|---------------------------------------------|
| Product Reference                | Construction Material                       | Thermal Management                       | LED Technology                              |
| Environment<br>Indoor            | Housing<br>Die Cast Aluminium               | Heat Sink Material<br>Die Cast Aluminium | LED Lifetime @L70/B10<br>> 50000 Hrs.       |
| Installation<br>Ceiling Recessed | Body Finish<br>Powder Coating – White/Black | Cooling Technique<br>Passive Cooling     | Colour Rendering (CRI)<br>CRI80 as Standard |

|                                     |                                        |                                                            |                         |
|-------------------------------------|----------------------------------------|------------------------------------------------------------|-------------------------|
| General Features                    | Electrical System                      | Controls                                                   | Optical System          |
| Operating Temperature<br>0°C - 50°C | Driven With<br>Constant Current Driver | Standard<br>On / Off                                       | Beam Direction<br>Fixed |
| Ingress Protection (IP)<br>IP20     | Input Voltage<br>220V - 240V/50 - 60Hz | Optional<br>Mains / Analog / Dali<br>Bluetooth / Phase Cut | Tilt<br>No              |
|                                     | Driver<br>Non - Integrated             |                                                            | Swivel<br>No            |

Product Details

| Product Name      | Wattage | Dimensions<br>(Sizes in mm)          | CCT<br>(Kelvin)    | Lumens  | Beam<br>Angle | Dimming Option                | Finish        |
|-------------------|---------|--------------------------------------|--------------------|---------|---------------|-------------------------------|---------------|
| CG - DL - 01 SOLO | 12W     | Φ82mm x (H)37mm<br>Cut out: Φ75mm    | 3000 / 4000 / 6500 | 1200 lm | 120°          | BLE/DALI/ANALOG/PHAS<br>E CUT | White / Black |
| CG - DL - 01 SOLO | 18W     | Φ104mm x (H)41mm<br>Cut - out: Φ95mm | 3000 / 4000 / 6500 | 1800 lm | 120°          | BLE/DALI/ANALOG/PHAS<br>E CUT | White / Black |
| CG - DL - 01 SOLO | 24W     | Φ130mm x (H)44mm<br>Cut out: Φ120mm  | 3000 / 4000 / 6500 | 2400 lm | 120°          | BLE/DALI/ANALOG/PHAS<br>E CUT | White / Black |

Manufacturer / Importer  
Core GreenTech LLP  
148/1179, Shree Sai Sahajeevan,  
Motilal Nagar 1, Road No. 3,  
Goregaon – (West) Mumbai – 400104.  
Maharashtra. India