


Product & Installation Details

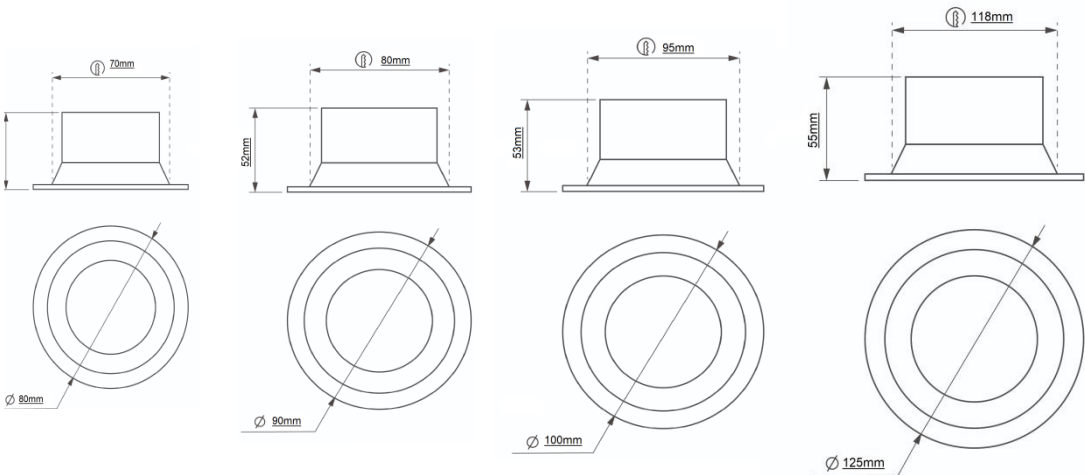

General Specifications

Product Reference	Construction Material	Thermal Management	LED Technology
Environment Indoor	Housing Die Cast Aluminium	Heat Sink Material Die Cast Aluminium	LED Lifetime @L70/B10 > 50000 Hrs.
Installation Ceiling Recessed	Body Finish Powder Coating – White/Black	Cooling Technique Passive Cooling	Colour Rendering (CRI) CRI80 as Standard
General Features	Electrical System	Controls	Optical System
Operating Temperature 0°C - 50°C	Driven With Constant Current Driver	Standard On / Off	Beam Direction Fixed
Ingress Protection (IP) IP20	Input Voltage 220V - 240V/50 - 60Hz	Optional Mains / Analog / Dali Bluetooth / Phase Cut	Tilt No
	Driver Non - Integrated		Swivel No

Product Details

Product Name	Wattage	Dimensions (Sizes in mm)	CCT (Kelvin)	Lumens	Beam Angle	Dimming Option	Finish
CG - 08 - CELLO	8W	80 Dia X 45 H Ø 70	3000 / 4000 / 6000	800 lm	120°	BLE/DALI/ANALOG/ PHASE CUT/ TUNABLE	White / Black
CG - 08 - CELLO	12W	90 Dia X 52 H Ø80	3000 / 4000 / 6000	1200 lm	120°	BLE/DALI/ANALOG/ PHASE CUT/ TUNABLE	White / Black
CG - 08 - CELLO	18W	100 Dia X 53 H Ø 95	3000 / 4000 / 6000	1800 lm	120°	BLE/DALI/ANALOG/ PHASE CUT/ TUNABLE	White / Black
CG - 08 - CELLO	24W	125 Dia X 55 H Ø 118	3000 / 4000 / 6000	2400 lm	120°	BLE/DALI/ANALOG/ PHASE CUT/ TUNABLE	White / Black

Manufacturer / Importer
Core GreenTech LLP
148/1179, Shree Sai Sahajeevan,
Motilal Nagar 1, Road No. 3,
Goregaon – (West) Mumbai – 400104.
Maharashtra. India