


# DEEP CONE



## Product & Installation Details

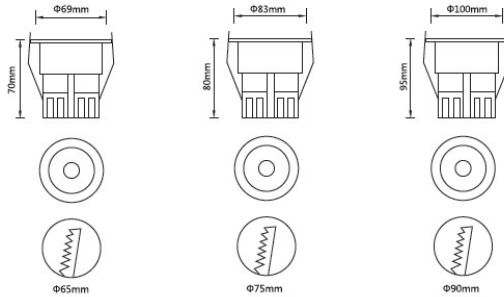

## General Specifications

| Product Reference                | Construction Material                       | Thermal Management                       | LED Technology                              |
|----------------------------------|---------------------------------------------|------------------------------------------|---------------------------------------------|
| Environment<br>Indoor            | Housing<br>Die Cast Aluminium               | Heat Sink Material<br>Die Cast Aluminium | LED Lifetime @L70/B10<br>> 50000 Hrs.       |
| Installation<br>Ceiling Recessed | Body Finish<br>Powder Coating – White/Black | Cooling Technique<br>Passive Cooling     | Colour Rendering (CRI)<br>CRI80 as Standard |

| General Features                    | Electrical System                      | Controls                                                   | Optical System          |
|-------------------------------------|----------------------------------------|------------------------------------------------------------|-------------------------|
| Operating Temperature<br>0°C - 50°C | Driven With<br>Constant Current Driver | Standard<br>On / Off                                       | Beam Direction<br>Fixed |
| Ingress Protection (IP)<br>IP20     | Input Voltage<br>220V-240V/50-60Hz     | Optional<br>Mains / Analog / Dali<br>Bluetooth / Phase Cut | Tilt<br>No              |
|                                     | Driver<br>Non-Integrated               |                                                            | Swivel<br>No            |

## Product Details

| Product Name                 | Wattage | Dimensions<br>(Sizes in mm) | CCT<br>(Kelvin)    | Lumens  | Beam<br>Angle | Dimming Option                | Finish                                                                                                      |
|------------------------------|---------|-----------------------------|--------------------|---------|---------------|-------------------------------|-------------------------------------------------------------------------------------------------------------|
| CG - 13 - DELTA - COB - SPOT | 7W      | 70 Dia X 70 H<br>Ø 65       | 3000 / 4000 / 6500 | 700 lm  | 24 ° 36°      | BLE/DALI/ANALOG/P<br>HASE CUT | BODY COLOR : WHITE / BLACK<br>RING COLOR : WHITE / GREY /<br>GOLDEN / ROSE GOLD /<br>CHROME / SHINING BLACK |
| CG - 13 - DELTA - COB - SPOT | 12W     | 83 Dia X 80 H<br>Ø 75       | 3000 / 4000 / 6500 | 1200 lm | 24 ° 36°      | BLE/DALI/ANALOG/P<br>HASE CUT | BODY COLOR : WHITE / BLACK<br>RING COLOR : WHITE / GREY /<br>GOLDEN / ROSE GOLD /<br>CHROME / SHINING BLACK |
| CG - 13 - DELTA - COB - SPOT | 18W     | 100 Dia X 95 H<br>Ø 90      | 3000 / 4000 / 6500 | 1800 lm | 24 ° 36°      | BLE/DALI/ANALOG/P<br>HASE CUT | BODY COLOR : WHITE / BLACK<br>RING COLOR : WHITE / GREY /<br>GOLDEN / ROSE GOLD /<br>CHROME / SHINING BLACK |

Manufacturer / Importer

**Core GreenTech LLP**

148/1179, Shree Sai Sahajeevan,  
Motilal Nagar 1, Road No. 3,  
Goregaon – (West) Mumbai – 400104.  
Maharashtra. India

Call: +91 9833297972 | +91 9930526017  
Email: projects@coregreentech.co.in

www.coregreenlighting.com  
© Copyright 2024 Core GreenTech LLP. All rights reserved