


Product & Installation Details

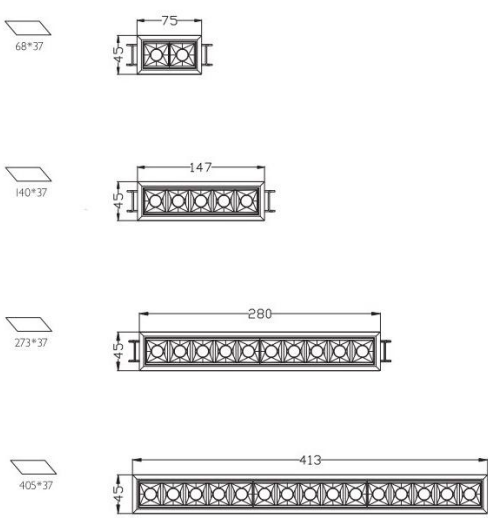

General Specifications

Product Reference	Construction Material	Thermal Management	LED Technology
Environment Indoor	Housing Die Cast Aluminium	Heat Sink Material Die Cast Aluminium	LED Lifetime @L70/B10 > 50000 Hrs.
Installation Ceiling Recessed	Body Finish Powder Coating – White/Black	Cooling Technique Passive Cooling	Colour Rendering (CRI) CRI80 as Standard
General Features	Electrical System	Controls	Optical System
Operating Temperature 0°C - 50°C	Driven With Constant Current Driver	Standard On / Off	Beam Direction Fixed
Ingress Protection (IP) IP20	Input Voltage 220V - 240V/50 - 60Hz	Optional Mains / Analog / Dali Bluetooth / Phase Cut	Tilt No
	Driver Non - Integrated		Swivel No

Product Details

Product Name	Wattage	Dimensions (Sizes in mm)	CCT (Kelvin)	Lumens	Beam Angle	Dimming Option	Finish
CG - 26 LIZZY	4W	75 L X 45 D X 49H 68 X 37	3000 / 4000 / 6500	90 lm/ watt	24 ° 40 °	BLE/DALI/ANALOG/PHAS E CUT	Grey + White
CG - 26 LIZZY	10W	147 L X 45 D X 49H 140 X 37	3000 / 4000 / 6500	90 lm/ watt	24 ° 40 °	BLE/DALI/ANALOG/PHAS E CUT	Grey + White
CG - 26 LIZZY	20W	280 L X 45 D X 49H 140 X 37	3000 / 4000 / 6500	90 lm/ watt	24 ° 40 °	BLE/DALI/ANALOG/PHAS E CUT	Grey + White
CG - 26 LIZZY	30W	413 L X 45 D X 49H 405 X 37	3000 / 4000 / 6500	90 lm/ watt	24 ° 40 °	BLE/DALI/ANALOG/PHAS E CUT	Grey + White

Manufacturer / Importer
Core GreenTech LLP
148/1179, Shree Sai Sahajeevan,
Motilal Nagar 1, Road No. 3,
Goregaon – (West) Mumbai – 400104.
Maharashtra. India