


Product & Installation Details

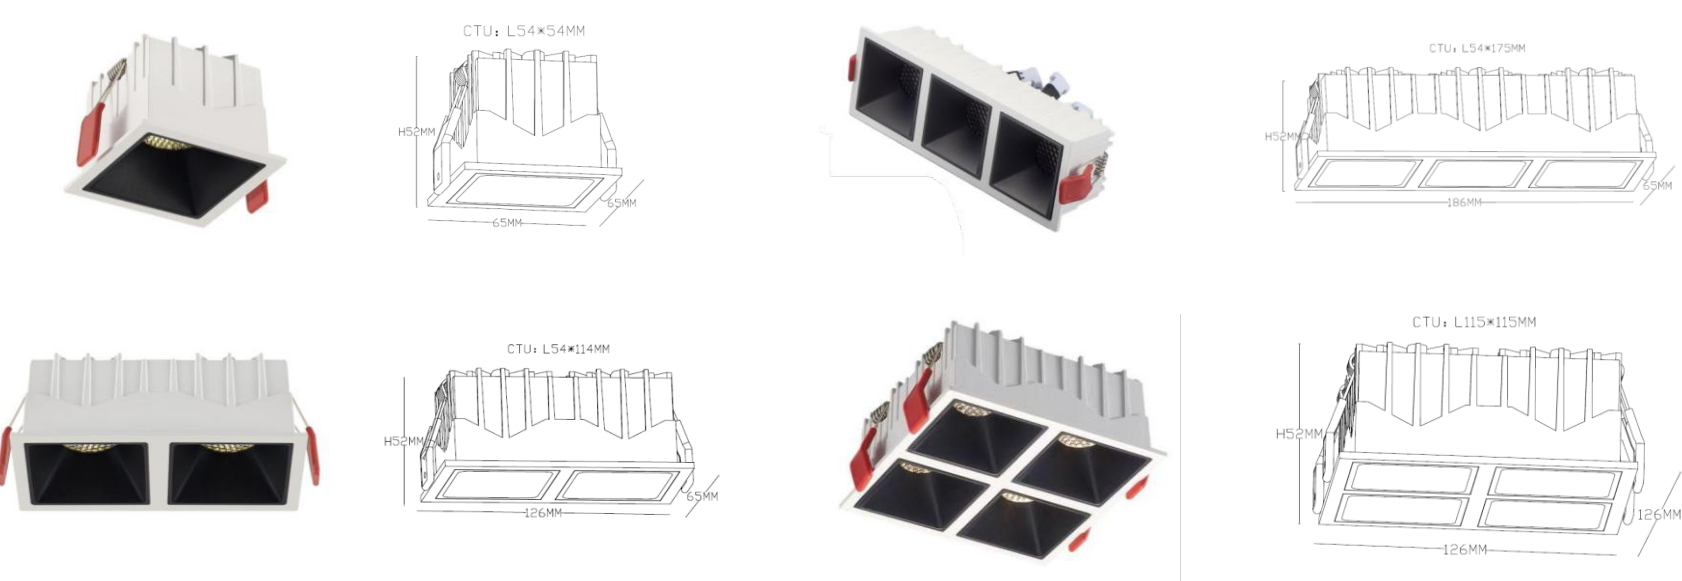

General Specifications

|                                  |                                             |                                          |                                             |
|----------------------------------|---------------------------------------------|------------------------------------------|---------------------------------------------|
| Product Reference                | Construction Material                       | Thermal Management                       | LED Technology                              |
| Environment<br>Indoor            | Housing<br>Die Cast Aluminium               | Heat Sink Material<br>Die Cast Aluminium | LED Lifetime @L70/B10<br>> 50000 Hrs.       |
| Installation<br>Ceiling Recessed | Body Finish<br>Powder Coating – White/Black | Cooling Technique<br>Passive Cooling     | Colour Rendering (CRI)<br>CRI80 as Standard |

|                                     |                                        |                                                            |                         |
|-------------------------------------|----------------------------------------|------------------------------------------------------------|-------------------------|
| General Features                    | Electrical System                      | Controls                                                   | Optical System          |
| Operating Temperature<br>0°C - 50°C | Driven With<br>Constant Current Driver | Standard<br>On / Off                                       | Beam Direction<br>Fixed |
| Ingress Protection (IP)<br>IP20     | Input Voltage<br>220V - 240V/50 - 60Hz | Optional<br>Mains / Analog / Dali<br>Bluetooth / Phase Cut | Tilt<br>No              |
|                                     | Driver<br>Non - Integrated             |                                                            | Swivel<br>No            |

Product Details

| Product Name   | Wattage | Dimensions<br>(Sizes in mm)      | CCT<br>(Kelvin)    | Lumens  | Beam<br>Angle | Dimming Option                         | Finish        |
|----------------|---------|----------------------------------|--------------------|---------|---------------|----------------------------------------|---------------|
| CG - 30 - DUKE | 7W X 1  | 65L X 65W X 52H<br>Ø 54 X 54     | 3000 / 4000 / 6000 | 700 lm  | 36°           | BLE/DALI/ANALOG/<br>PHASE CUT/ TUNABLE | White / Black |
| CG - 30 - DUKE | 7W X 2  | 65L X 126W X 52H<br>Ø 54 X 114   | 3000 / 4000 / 6000 | 1400 lm | 36°           | BLE/DALI/ANALOG/<br>PHASE CUT/ TUNABLE | White / Black |
| CG - 30 - DUKE | 7W X 3  | 65L X 186W X 52H<br>Ø 54 X 175   | 3000 / 4000 / 6000 | 2100 lm | 36°           | BLE/DALI/ANALOG/<br>PHASE CUT/ TUNABLE | White / Black |
| CG - 30 - DUKE | 7W X 4  | 126L X 126W X 52H<br>Ø 115 X 115 | 3000 / 4000 / 6000 | 2800 lm | 36°           | BLE/DALI/ANALOG/<br>PHASE CUT/ TUNABLE | White / Black |

Manufacturer / Importer

**Core GreenTech LLP**  
148/1179, Shree Sai Sahajeevan,  
Motilal Nagar 1, Road No. 3,  
Goregaon – (West) Mumbai – 400104.  
Maharashtra. India