


Product & Installation Details

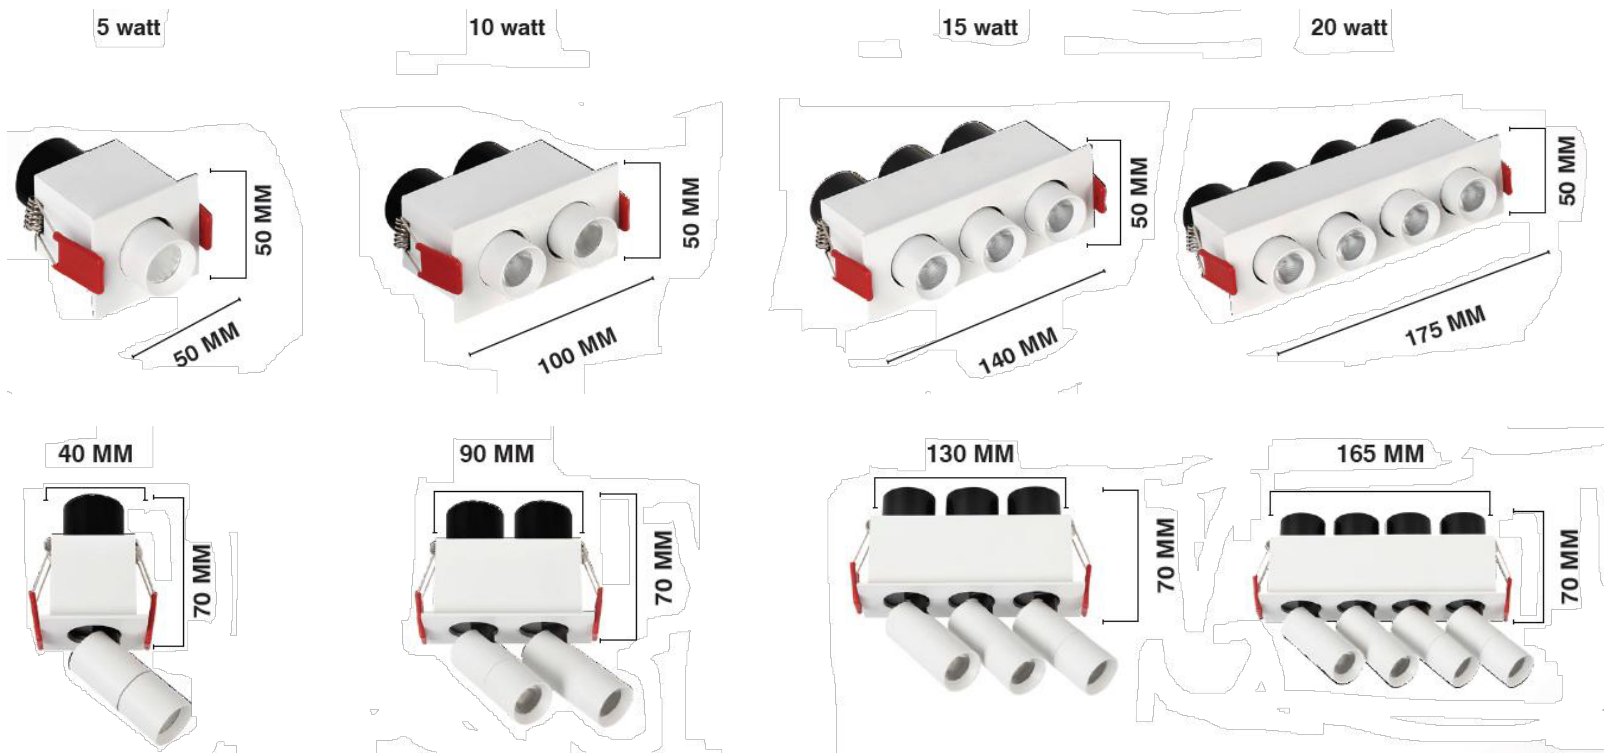

General Specifications

Product Reference Environment Indoor Installation Ceiling Recessed	Construction Material Housing Die Cast Aluminium Body Finish Powder Coating – White/Black	Thermal Management Heat Sink Material Die Cast Aluminium Cooling Technique Passive Cooling	LED Technology LED Lifetime @L70/B10 > 50000 Hrs. Colour Rendering (CRI) CRI80 as Standard
General Features Operating Temperature 0°C - 50°C Ingress Protection (IP) IP20	Electrical System Driven With Constant Current Driver Input Voltage 220V - 240V/50 - 60Hz Driver Non - Integrated	Controls Standard On / Off Optional Mains / Analog / Dali Bluetooth / Phase Cut	Optical System Beam Direction Fixed Tilt Yes Swivel Yes

Product Details

Product Name	Wattage	Dimensions (Sizes in mm)	CCT (Kelvin)	Lumens	Beam Angle	Dimming Option	Finish
CG - 37 PULL OUT MINI	05 W X 1	50X50 Dia X 70 H Ø 40	3000 / 4000 / 6500	500 lm	24° 36°	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - 37 PULL OUT MINI	05W x 2	100X50 Dia X 70 H Ø 90	3000 / 4000 / 6500	1000 lm	24° 36°	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - 37 PULL OUT MINI	05W x 2	140X50 Dia X 70 H Ø 135	3000 / 4000 / 6500	1500 lm	24° 36°	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - 37 PULL OUT MINI	05W x 2	175X50 Dia X 70 H Ø 165	3000 / 4000 / 6500	2000 lm	24° 36°	BLE/DALI/ANALOG/PHASE CUT	White / Black

Manufacturer / Importer

Core GreenTech LLP
148/1179, Shree Sai Sahajeevan,
Motilal Nagar 1, Road No. 3,
Goregaon – (West) Mumbai – 400104.
Maharashtra. India

Call: +91 9833297972 | +91 9930526017
Email: projects@coregreentech.co.in