
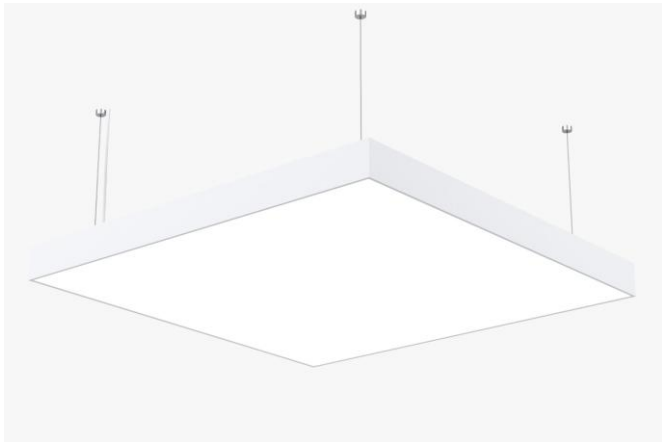


Product & Installation Details

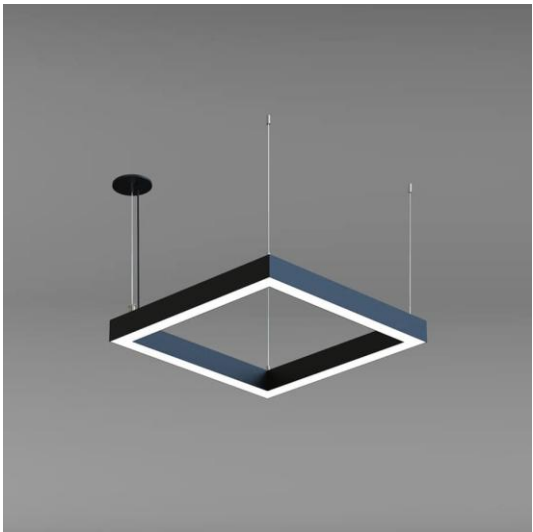

Full Glow

General Specifications

Product Reference Environment Indoor Installation Ceiling Recessed	Construction Material Housing Die Cast Aluminium Body Finish Powder Coating – White/Black	Thermal Management Heat Sink Material Die Cast Aluminium Cooling Technique Passive Cooling	LED Technology LED Lifetime @L70/B10 > 50000 Hrs. Colour Rendering (CRI) CRI80 as Standard
General Features Operating Temperature 0°C-50°C Ingress Protection (IP) IP20	Electrical System Driven With Constant Current Driver Input Voltage 220V-240V/50-60Hz Driver Non-Integrated	Controls Standard On / Off Optional Mains / Analog / Dali Bluetooth / Phase Cut	Optical System Beam Direction Fixed Tilt No Swivel No

Product Details

Product Name	Wattage	Dimensions (Sizes in mm)	CCT (Kelvin)	Lumens	Beam Angle	Dimming Option	Finish
CG WS - 012 - Square	36W	1200 Length X 1200 Width	3000 / 4000 / 6500	100 lm / watt	110	BLE/DALI/ANALOG/PHAS E CUT	White / Black