


RAZOR (SQ)



Product & Installation Details

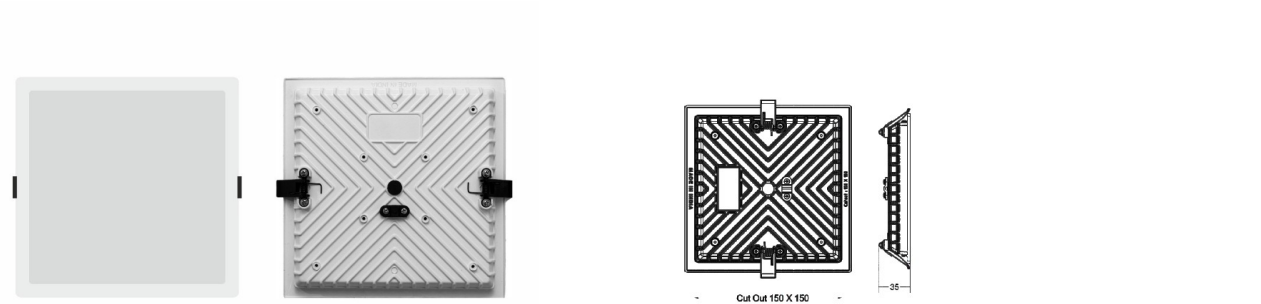

General Specifications

Product Reference Environment Indoor Installation Ceiling Recessed	Construction Material Housing Die Cast Aluminium Body Finish Powder Coating – White/Black	Thermal Management Heat Sink Material Die Cast Aluminium Cooling Technique Passive Cooling	LED Technology LED Lifetime @L70/B10 > 50000 Hrs. Colour Rendering (CRI) CRI80 as Standard
General Features Operating Temperature 0°C - 50°C Ingress Protection (IP) IP20	Electrical System Driven With Constant Current Driver Input Voltage 220V-240V/50-60Hz Driver Non-Integrated	Controls Standard On / Off Optional Mains / Analog / Dali Bluetooth / Phase Cut	Optical System Beam Direction Fixed Tilt No Swivel No

Product Details

Product Name	Wattage	Dimensions (Sizes in mm)	CCT (Kelvin)	Lumens	Beam Angle	Dimming Option	Finish
CG - DL - 03 RAZOR (SQ)	08W	120 Dia X 35 H Ø 100 X 100	3000 / 4000 / 6500	800 lm	38 °	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - DL - 03 RAZOR (SQ)	12W	145 Dia X 35 H Ø 125 X 125	3000 / 4000 / 6500	1200 lm	38 °	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - DL - 03 RAZOR (SQ)	18W	170 Dia X 35 H Ø 150 X 150	3000 / 4000 / 6500	1800 lm	38 °	BLE/DALI/ANALOG/PHASE CUT	White / Black
CG - DL - 03 RAZOR (SQ)	24W	195 Dia X 35 H Ø 75 X 75	3000 / 4000 / 6500	2400 lm	38 °	BLE/DALI/ANALOG/PHASE CUT	White / Black

Manufacturer / Importer

Core GreenTech LLP
 148/1179, Shree Sai Sahajeevan,
 Motilal Nagar 1, Road No. 3,
 Goregaon - (West) Mumbai - 400104.
 Maharashtra, India

Call: +91 9833297972 | +91 9930526017
 Email: projects@coregreentech.co.in